

AUTOSALT®



35

55

95

155

300

High performance saltwater chlorinator

AUTOSALT®

High performance saltwater chlorinator

- **Advanced and user friendly board:** direct access keys, choice of language, display of pool parameters (production/salt level/ water temperature/suggested filtration time)
- **Exclusive Smart Power technology** allows to operate with any salt level from 2.5 g/l to 35 g/l
- **BOOST mode** 24 hours super-chlorination to compensate high swimmer load or bad weather
- **LOW MODE** to reduce chlorine production when cover is closed
- **Automatic winterizing from 15° C**, automatic pool opening
- **User menu:** set up, choice of language, BOOST mode and salt adjustment.
- **Professional menu** for easy maintenance: parameters, chlorination diagnostic, timer, history, software update...
- **Self-cleaning cell** by progressive and adjustable polarity inversion from 0 to 24 hours, depending on the water hardness (analysis kit supplied)
- **Safety:** water shortage/no flow/low salt level/low temperature/scaled or deteriorated cell alarms
- **Up gradable device:** software update, compatible with different modules and options

AUTOSALT® +

- Salt level display
- History events
- Large digital screen and direct access keys
- Navigation menu available in 9 languages

OPTIONS

- **PLUG & PLAY pH** to ensure a pH regulation
- Cable for **LOW MODE** function
- Pool automation system **SIMPLEO®**
- Independent flow sensor

PLUG & PLAY pH

THE AUTOSALT® ACCESSORY




Unsurpassed disinfection and comfort



MODEL	35	55	95	155	300
Pool volume (m ³) In hot climates, reduce the volume by 20 %	35	50	95	155	300
Chlorine production g/h	8	11	20	30	60
Cell installation	in line	in line	in line	in line	in line
Cell orientation	↑ →	↑ →	↑ →	↑ →	↑ →
Cell length (mm)	225	225	225	225	225
Maximum pressure in the cell - bar	2	2	2	2	2
Maximum flow rate in the cell – m ³	22 or by-pass	22 or by-pass	22 or by-pass	22 or by-pass	22 or by-pass
Maximum water temperature °C	40	40	40	40	40
Controller dimension (mm)	L400 x H190 x P180	L400 x H190 x P180	L400 x H190 x P180	L400 x H190 x P180	L400 x H190 x P180
Weight (kg) - complete device	8,7	8,7	8,7	8,7	11

> AUTOSALT® DIAGRAM INSTALLATION

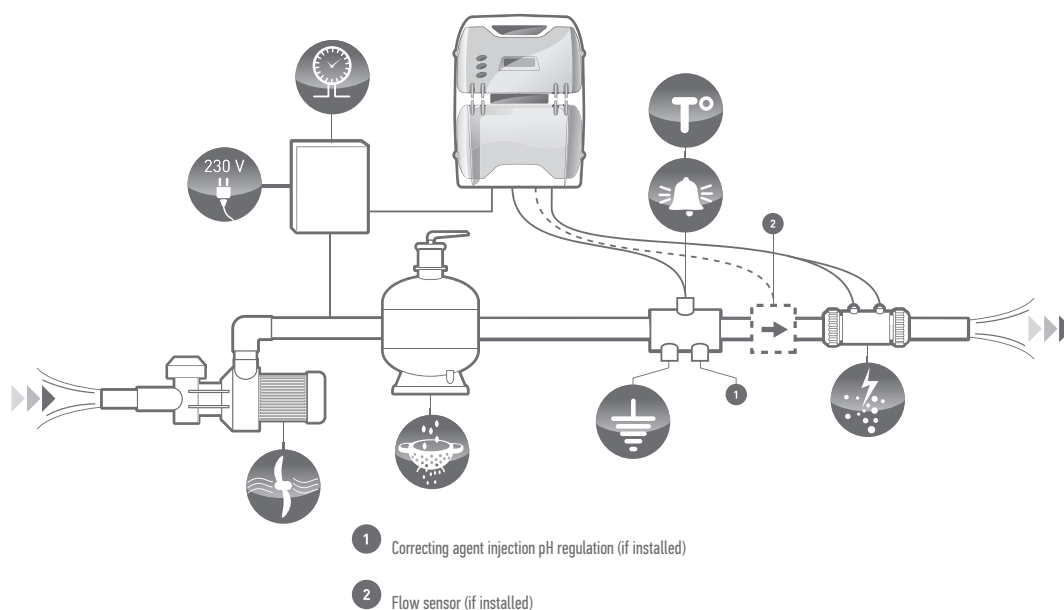

* See conditions p. 62



Accessories

35/55/95/155

1 controller with 1 cell power cable,
1 chlorination cell with 2 nuts, 2 collars and two 63/50 mm reducers, 1 salt / water hardness analysis kit, 1 water low / salt / temperature sensor, 1 accessories holder provided with a POOL TERRE grounding kit and 3 ½" plugs, 1 mounting kit (screw anchors, screws and insulating washers), 1 user manual

300

Following are also supplied:
1 extension cable 1 Chlorination cell with 2 nuts and 2 collars, 2 63/50 mm reducers and 1 cell cable.