

# JUSTSALT®



60

90

120

## Saltwater chlorinator

### JUSTSALT®

Value for money saltwater chlorinator providing many functions

- **Easy to use:** digital display and comprehensive setting menu
- **Self cleaning cell** by adjustable polarity inversion from 0 to 16 hours according to water hardness (analysis kit supplied)
- **Chlorinator advanced diagnostic** program to facilitate maintenance
- **BOOST mode** for 24 hour super chlorination to compensate high swimmer load or bad weather
- **Safety:** low water/ low salt, wear cell alarms, no flow alarm
- **LOW MODE** to reduce chlorine production when LOW mode is closed
- **Automatic winterizing** from 15 °C, automatic pool opening

### JUSTSALT® 60/90/120 +

- **Display of water temperature**
- **Automatic pool winterizing** and **pool opening**
- **Chlorinator advanced diagnostic**

### OPTIONS

- **POOL TERRE** grounding kit
- Cable for **LOW MODE** function
- **Pool automation system SIMPLEO®**



**Permanent display**  
of chlorine production level

**2 warning lights:**  
Green indicates device is on  
Red indicates error or alarm

**Adjustable production**  
from 0 à 99 % with a simple key



→ **ACCESSORIES HOLDER**  
FOR AN EASY INSTALLATION




→ **SALT/pH TEST**  
STRIPS

# More functionalities for more comfort



| MODEL  | 60                 | 90                 | 120                |
|--|--------------------|--------------------|--------------------|
| Pool volume (m <sup>3</sup> ) In hot climates, reduce the volume by 20 % | 60                 | 90                 | 120                |
| Chlorine production g/h  | 15                 | 20                 | 30                 |
| Adjustable polarity inversion  | ✓                  | ✓                  | ✓                  |
| LOW mode   | ✓                  | ✓                  | ✓                  |
| BOOST mode   | ✓                  | ✓                  | ✓                  |
| Accessories holder   | ✓                  | ✓                  | ✓                  |
| Cell installation  | in line            | in line            | in line            |
| Cell orientation   | ↑ →                | ↑ →                | ↑ →                |
| Cell length (mm)   | 225                | 225                | 225                |
| Maximum pressure in the cell - bar                                       | 2                  | 2                  | 2                  |
| Maximum flow rate in the cell – m <sup>3</sup>                           | 22 or by-pass      | 22 or by-pass      | 22 or by-pass      |
| Maximum water temperature °C   | 40                 | 40                 | 40                 |
| Controller dimension (mm)  | L260 x H380 x P160 | L260 x H380 x P160 | L260 x H380 x P160 |
| Weight (kg) - complete device  | 7,3                | 8,1                | 8,1                |

## > JUSTSALT® DIAGRAM INSTALLATION

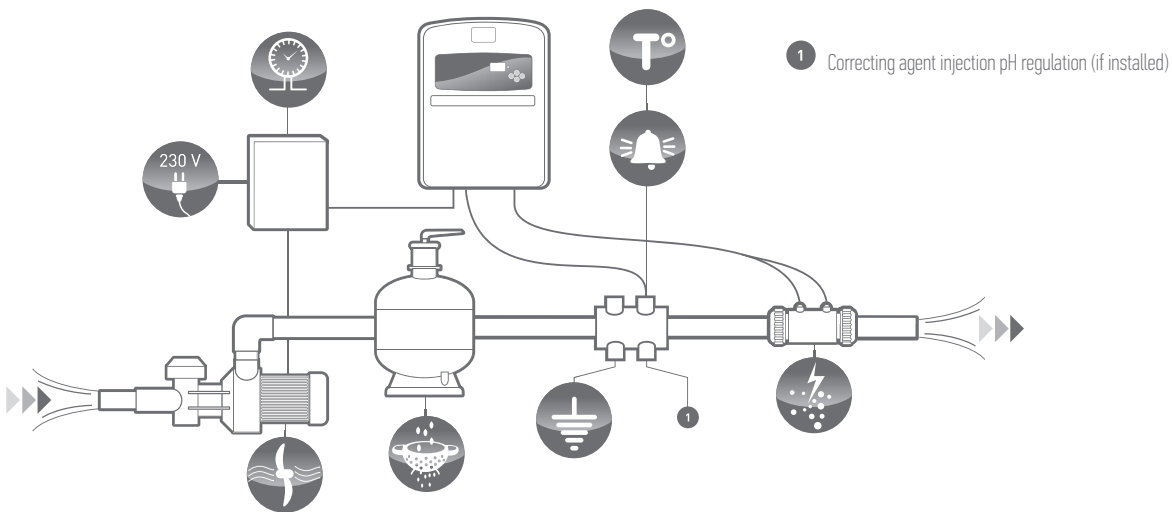

## Accessories

60/90/120

1 controller, 1 fixation kit (inserts and screws), 1 cell cable, 1 chlorination cell with 2 nuts and 2 flanges, 1 analysis kit salt/water hardness, 1 salt shortage / water shortage / temperature sensor, 1 accessories holder provided with 3 1/2" plugs and 1 1/2" plug, 2 saddles ø 50 mm x 1/2", 1 pH probe, 1 pH kit including: 5 m semi-rigid tubing, 1 suction strainer, 1 probe holder ø 1/2", 1 ø 1/2" injection connector, 2 63/50 mm reducers, 1 user manual



See conditions p. 62

The natural care for clear water

JUST

FAMILY POOLS