

# AUTOCLEAN®



## Copper & silver ionisator

### AUTOCLEAN® UNO

Disinfection by copper & silver ionisation

### AUTOCLEAN® TRIO

Disinfection by copper & silver, complementary chlorine treatment and pH regulation

- Simple, effective and reliable technology
- Reduction of chlorine consumption up to 80 %
- Low maintenance thanks to its self cleaning electrodes (patented process)
- Ergonomic use by direct access keys
- AUTOCLEAN® TRIO offers you a complete treatment: ionisation, pH regulation and automatic injection of remanent product

### AUTOCLEAN® +

- Simple and efficient technology easy to operate; particularly suited to tiled pools
- AUTOCLEAN® TRIO, thanks to its 3 functions, is the unique ionisator to provide a complete treatment
- Unsurpassed crystal clear water

### OPTIONS

- Pool automation system SIMPLEO®




- AUTOCLEAN TRIO  
pH PROBE

# Cristal clear water and serenity



MODEL	UNO	TRIO
Pool volume (m <sup>3</sup> ) In hot climates, reduce the volume by 20%	35/65/95/125/155	35/65/95/125/155
pH regulation	-	✓
Remanent product injection	-	✓
Ionisation chamber mounting	in line	in line
Chamber orientation	→	→
Chamber length	depending on model	depending on model
Maximum pressure in the chamber - bar	2	2
Maximum flow in the chamber – m <sup>3</sup>	22	22
Maximum water temperature °C	40	40
Controller dimensions - (mm)	L400 x H190 x P180	L400 x H190 x P180
Weight - kg (complete device)	10	11

## > AUTOCLEAN®TRIO INSTALLATION DIAGRAM

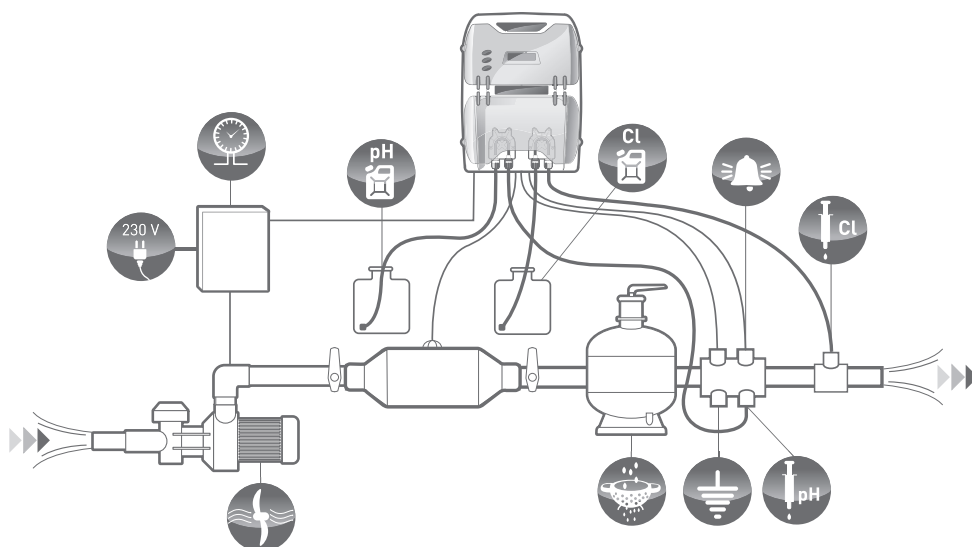

## Accessories

UNO	1 controller, 1 fixing kit (screw anchors, screws and insulating washers), 1 electrodes holder with power cable, 2 63/50 reducers, 1 copper/silver tests kit, 1 user manual
TRIO	1 controller, 1 fixing kit (screw anchors, screws and insulating washers), 1 electrodes holder with power cable, 2 63/50 reducers, 1 copper/silver tests kit, 1 accessories holder provided with a POOL TERRE grounding electrode and 2 ½» plugs, 1 water temperature /low water sensor, 1 saddle ø 50 mm x ½", 1 roll of Teflon Tape, 1 BLACK pH probe, 2 solutions buffer pH7 and pH10, 2 spares pipe (peristaltic pump) 1 pH kit including: 5 m of semi-rigid transparent tubing, 1 suction strainer, 1 injection connector ø ½". 1 disinfection kit including: 5 m of semi-rigid colored tubing, 1 suction strainer, 1 injection connector ø ½", 1 user manual



\* See conditions p. 62

